



# ATP SATA-III 2.5-inch SSD A600Sc

Power Loss Protection (PLP)

---

Datasheet

Version 3.0

**P/N**

AF120GSTCJ-7BEXP

AF240GSTCJ-7BEXP

AF480GSTCJ-7BEXP

AF960GSTCJ-7BEXP

AF1T92STCJ-7BEXP



# ATP SATA-III 2.5-inch SSD w/ PLP

## Product Summary/Features

- Capacities:
  - 120GB, 240GB, 480GB, 960GB, 1920GB
- Form Factors:
  - 2.5" SSD
- Thickness:
  - Standard: 7.0mm
  - By Option: 9.2mm
- Weight:
  - < 60 grams
- SATA 6Gb/s performance:
  - Sequential Read: Up to 560MB/s
  - Sequential Write: Up to 520MB/s
- Read and Write IOPS (QD32)
  - Random 4K Reads: Up to 100,000 IOPS
  - Random 4K Writes: Up to 91,000 IOPS
- Data Reliability
  - LDPC (Low Density Parity Check) ECC algorithm
  - RAID support for uncorrectable error recovery
- End-to-End Data Path Protection
- Integrated PLP (Power Loss Protection) for data integrity
- Compliant with Serial ATA Revision 3.2
- Support
  - SMART ATA feature set
  - NCQ (Native Command Queue)
  - TRIM command
  - Global wear-leveling
  - Thermal throttling mechanism
- Power Management
  - 5.0 V SATA Supply Voltage
  - SATA Link Power Management (LPM)
- Temperature, Case (T<sub>c</sub>)
  - Operating: 0°C to 70°C
  - Non-Operating: -40°C to 85°C
- Reliability
  - MTBF: 2M hours
  - Shock / Vibration: Compliant with MIL-STD 810G
  - Data Retention (@30°C): 5 Years (with 10% P/E Cycles)
- Endurance (TBW in Sequential Write)
  - 120GB: 349TB
  - 240GB: 698TB
  - 480GB: 1,396TB
  - 960GB: 2,792TB
  - 1920GB: 5,585TB
- Certifications, Declarations
  - CE
  - FCC
  - BSMI
  - UKCA
- Product Ecological Compliance
  - RoHS
  - REACH



# CONTENT

<b>Disclaimer</b> .....	<b>1</b>
<b>Revision History</b> .....	<b>2</b>
<b>1.0 Product Specification</b> .....	<b>3</b>
1.1 Product Image.....	3
1.2 Capacity .....	3
1.3 Environment Specifications.....	4
1.4 Reliability.....	4
1.5 Electrical Characteristics .....	5
1.6 IOPS.....	6
1.7 Maximum Read/Write Performance .....	6
1.8 Write/Erase Endurance <sup>1</sup> .....	6
<b>2.0 Product Overview</b> .....	<b>7</b>
2.1 Block Diagram.....	7
2.2 Power Loss Protection (PLP) --- Data Integrity Under Power-cycling.....	7
2.3 Auto-Refresh Technology --Data Integrity Protection.....	8
<b>3.0 Mechanical Dimension &amp; SATA SSD Pin Assignment</b> .....	<b>9</b>
3.1 Mechanical Form Factor (Units in mm) .....	9
3.2 Pin Location.....	9
3.3 Pin Assignment.....	10
<b>4.0 Command Set</b> .....	<b>11</b>
4.1 ATA Command Set.....	11
4.2 Identity Device Data.....	13
4.3 Smart Information.....	18
4.4 SMART Command Transport.....	19
4.5 Set Features.....	19
<b>5.0 Part Number Decoder</b> .....	<b>20</b>
<b>6.0 Certification and Declarations</b> .....	<b>21</b>



## Disclaimer

ATP Electronics Inc. shall not be liable for any errors or omissions that may appear in this document and disclaims responsibility for any consequences resulting from the use of the information set forth herein.

ATP may make changes to specifications and product descriptions at any time, without notice. The information in this paper is furnished for informational use only so ATP assumes no responsibility or liability for any errors or inaccuracies that may appear in this document.

All parts of the ATP documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from ATP Electronics, Inc.

Notwithstanding any clause of this Agreement, Supplier are not warranted and liable for use any Product in developing, or for incorporation into, products or services used in applications or environments requiring failsafe performance, such as in the operation of nuclear facilities, aircraft navigation or air traffic control, life support machines, surgically implanted devices, weapons systems, or other applications, devices or systems in which the failure of Product could lead directly to death, personal injury, or severe physical or environmental damage.

The information set forth in this document is considered to be “Proprietary” and “Confidential” property owned by ATP.

© Copyright ATP all rights reserved.



## Revision History

Date	Version	Changes compared to previous issue
Sept. 17 <sup>th</sup> , 2021	3.0	- 1 <sup>st</sup> release.

# 1.0 Product Specification

## 1.1 Product Image

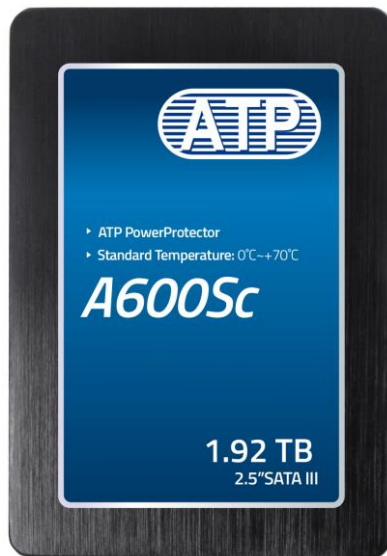


Figure 1-1: ATP Product Image (For reference)

## 1.2 Capacity

Table 1-2: Capacity Settings

Capacity	LBA <sup>1,2</sup>
120GB	234,441,648
240GB	468,862,128
480GB	937,703,088
960GB	1,875,385,008
1920GB	3,750,748,848

1. Sector size is 512 bytes
2. LBA counts are based on IDEMA (LBA1-03) standard
3. The total usable capacity of SSD may be less than physical capacity due to a few of spare block being used for the purposes of NAND management or FW operating.



### 1.3 Environment Specifications

**Table 1-3-1: Environment Specification**

Type		Standard
Temperature, Case (T <sub>c</sub> ) <sup>1</sup>	Operating	0°C to 70°C
	Non-Operating	-40°C to 85°C
Airflow <sup>2,3,4</sup>	Operating	600 LFM @ Max. T <sub>c</sub>
Rate of Temp. Change	Operating	1~2°C / minute
Relative Humidity	Operating	8% to 95%, noncondensing
	Non-Operating	8% to 93%, noncondensing

1. Case temperature, the device temperature as indicated by SMART temperature attribute. (ID:194)
2. Sufficient airflow is recommended for 100% sequential writes as the SSD approaches the case temperature in effort to maintain best performance. In the case the SSD temperature exceeds the assigned case temp, the SSD will throttle the performance to mitigate thermal challenges.
3. Airflow is measured upstream of the drive and flows parallel to and through any cooling fins.
4. For more information, please contact your local ATP representative.

**Table 1-3-2: MIL-STD 810G Shock / Vibration:**

Type		Standard
Vehicle Vibration Operating	Method 514.6, Figure 514.6C-3 Category4	Composite wheeled vehicle vibration exposure. Frequency: 5~500 Hz. Test duration: 1 Hour x 3 axis
Aircraft Vibration	Figure 514.6D-3, Category 14	Helicopter vibration. Frequency: 10~500 Hz. Test duration: 1 Hour x 3 axis.
Vibration Integrity	Figure 514.6E-1, Category 24	General minimum integrity exposure. Frequency: 20~2000 Hz. Test duration: 1 Hour x 3 axis.
Mechanical Shock	Method 516.6, Figure 516.6-10	40G, 11 ms, saw-tooth pulse configuration, 6 faces with 3 shocks per axis.

### 1.4 Reliability

**Table1-4: Reliability**

Type	Value
MTBF (T <sub>a</sub> @ 25°C) <sup>1</sup>	>2,000,000 hours
Data Retention (T <sub>a</sub> @ 30°C) <sup>2</sup>	5 years (with 10% P/E cycle)

1. The Mean Time between Failures (MTBF) is calculated using a prediction methodology, Telcordia SR-332, which based on reliability data of the individual components in drive. It assumes nominal voltage, with all other parameters within specified range.
2. Data retention value may vary across different temperature range and is experimental result to be used for reference.



## 1.5 Electrical Characteristics

**Table 1-5-1: Supply Power**

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Supply voltage	V <sub>CC</sub>	4.5	5.0	5.5	V	

**Table 1-5-2: Power Consumption Measurement<sup>1,2</sup>**

### 120GB

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Sustained write power	P <sub>W</sub>	-	2.8	3.6	W	RMS value
Sustained read power	P <sub>R</sub>	-	2.1	3.1	W	RMS value
Idle power	P <sub>S</sub>	-	0.8	1.3	W	RMS value

### 240GB

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Sustained write power	P <sub>W</sub>	-	3.1	4.0	W	RMS value
Sustained read power	P <sub>R</sub>	-	2.1	3.1	W	RMS value
Idle power	P <sub>S</sub>	-	0.8	1.3	W	RMS value

### 480GB

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Sustained write power	P <sub>W</sub>	-	3.8	5.1	W	RMS value
Sustained read power	P <sub>R</sub>	-	2.3	3.3	W	RMS value
Idle power	P <sub>S</sub>	-	0.8	1.3	W	RMS value

### 960GB

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Sustained write power	P <sub>W</sub>	-	4.0	5.5	W	RMS value
Sustained read power	P <sub>R</sub>	-	2.5	3.7	W	RMS value
Idle power	P <sub>S</sub>	-	0.8	1.3	W	RMS value

### 1920GB

Parameter	Symbol	Min	Typ.	Max	Unit	Remark
Sustained write power	P <sub>W</sub>	-	4.0	5.5	W	RMS value
Sustained read power	P <sub>R</sub>	-	2.9	3.7	W	RMS value
Idle power	P <sub>S</sub>	-	0.8	1.3	W	RMS value

1. All power measured is under room temperature and using SATA3 interface.
2. Power measured under 100% sequential read mode or 100% sequential write mode with 1023MB data transfers.





## 1.6 IOPS

**Table 1-6: IOPS<sup>1,2,3</sup> (QD32) (Up to)**

Capacity	4K Random Read IOPS (QD32)	4K Random Write IOPS (QD32)
120GB	68,000	86,000
240GB	100,000	86,000
480GB	100,000	88,000
960GB	100,000	91,000
1920GB	100,000	91,000

1. IOPS may vary by application/system usage
2. IOPS is calculated by dividing capacity by (4K QD32 testing result)/4x1024
3. The testing is assumed under clean state

## 1.7 Maximum Read/Write Performance

**Table 1-7: Performance<sup>1,2</sup> (Up to)**

Type	Capacity	Sequential Read	Sequential Write
Crystal Disk Mark	120GB	560 MB/s	470 MB/s
	240GB	560 MB/s	510 MB/s
	480GB	560 MB/s	470 MB/s
	960GB	560 MB/s	520 MB/s
	1920GB	560 MB/s	520 MB/s

1. Performance may vary by application/system usage.
2. Performance is measured by CrystalDiskMark. The testing drive is assumed under clean state.
3. All performance measured is under room temperature.

## 1.8 Write/Erase Endurance<sup>1</sup>

**Table 1-8: TBW<sup>1</sup>**

Capacity	Random write <sup>2</sup> (JEDEC Enterprise)	Sequential write <sup>3</sup>
120GB	48 TB	349 TB
240GB	153 TB	698 TB
480GB	307 TB	1,396 TB
960GB	614 TB	2,792 TB
1920GB	1,228 TB	5,585 TB

1. Endurance can be predicted based on the usage conditions applied to the device, the internal NAND component cycles, the write amplification factor, and the wear leveling efficiency of the drive. TBW may vary depending on application, please contact ATP for TCO evaluation if specific usage type applies.
2. The random endurance calculation is based on JESD219A Enterprise workload.
3. The sequential write endurance calculation is based on pure sequential write at 128K transfer size to run in 4K alignment test pattern



## 2.0 Product Overview

### 2.1 Block Diagram

ATP SSD consists of below functional blocks. The advanced architecture is optimized to provide highest data reliability and transfer performance.

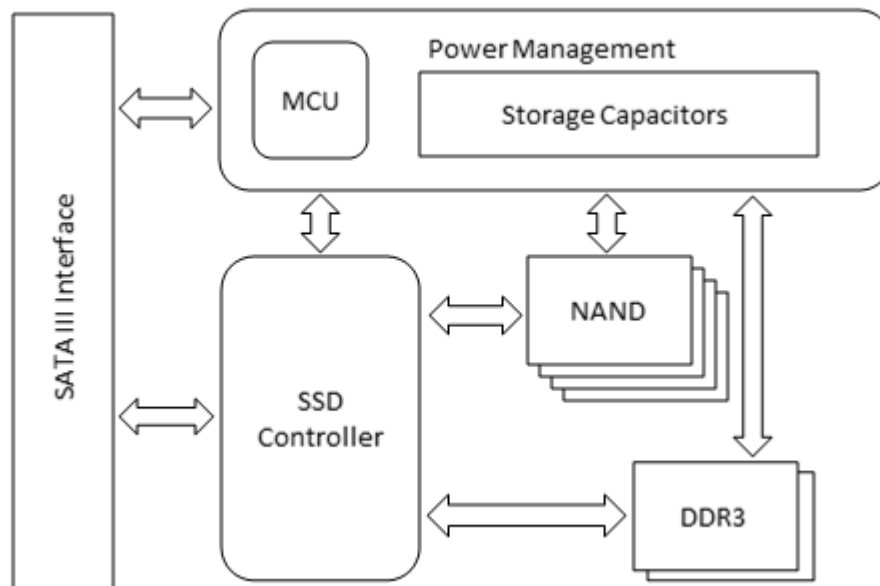


Figure 2-1: Block diagram for ATP SATAIII SSD

### 2.2 Power Loss Protection (PLP) --- Data Integrity Under Power-cycling

Many applications may suffer from a sudden power loss event which may lead to the risk of data loss or drive corruption.

To prevent SSD failure during a sudden power loss event, this product has onboard power loss protection (PLP). PLP provides the SSD with sufficient backup power to safely store any in-flight data and gracefully shutdown the SSD. This feature takes any burden off the host system to manage a safe shutdown of the SSD, therefore simplifying the host design.

Th power abnormality is identified by a power loss detection circuit which activates the power protection mechanism. The SSD then draws power from the onboard power reserve, which provides enough time for the flash device to conclude the last commands without losing any data or corruption of data.



### 2.3 Auto-Refresh Technology --Data Integrity Protection

Over time the error bits accumulate to the threshold in the flash memory cell and eventually become uncorrectable despite the use of an ECC engine. In the traditional handling method, the data is moved to a different location in the flash memory; despite the corrupted data is beyond repaired before the transition.

The situation is worse in frequent read applications, such as navigation systems or OS boot-up devices. The map or operating system is preloaded into the storage media and there may be one time write and following by read operation only. Read disturbance is the result of electrical interference from multiple read operations in surrounding cells. After NAND flash accumulates 100,000 read cycles, uncorrectable ECC errors may occur in the affected pages which results in data failure in the same block.

To prevent data corruption, ATP memory product monitors the error bit levels in each read operation. When it reaches the preset threshold value, Auto-Refresh is activated by programming the data into another block before the data is corrupted. After the re-programming operation is completed, the controller reads the data and compares the data/parity to ensure data integrity.

Owing to different user experiences, please contact ATP for Auto-Refresh in real applications.




### 3.0 Mechanical Dimension & SATA SSD Pin Assignment

#### 3.1 Mechanical Form Factor (Units in mm)

Table 3.1: Mechanical Dimension


Type		Value
2.5" SSD	Length	100.00 mm +/- 0.25mm
	Width	69.85 mm +/- 0.25 mm
	Thickness	7.00mm + 0.0mm/ -0.5mm

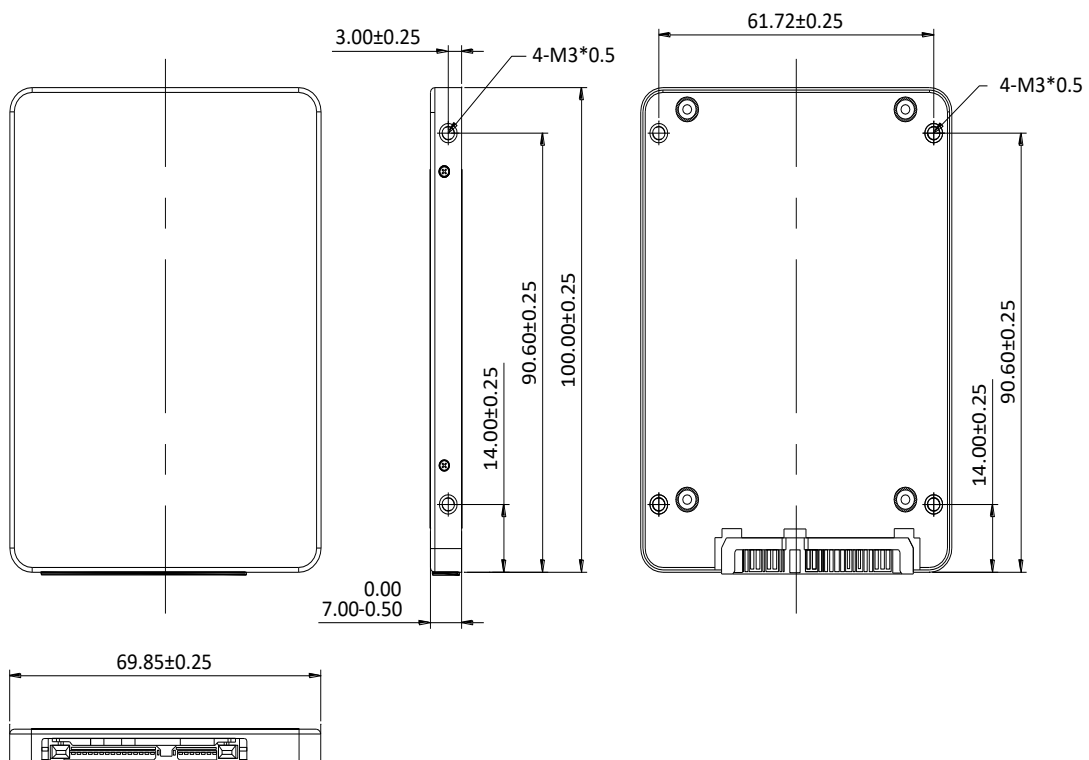

#### 3.2 Pin Location

The following figure shows the pin location of the 2.5" SSD, the connector is with both signal and power segments.

Figure 3-2

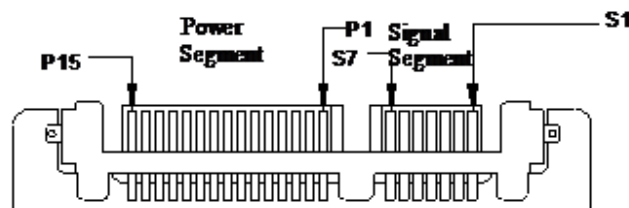



### 3.3 Pin Assignment

There are total of 7 pins in the signal segment and 15 pins in the power segment. The pin definitions are shown in Table 3-3-1 & 3-3-2

**Table 3-3-1 Signal Segment Pin Assignment and Descriptions**

Pin No. <sup>1</sup>	Function	Description
S1	GND	Ground
S2	A+	Differential signal pair A
S3	A-	
S4	GND	Ground
S5	B-	Differential signal pair B
S6	B+	
S7	GND	Ground

Note: All pins are in a single row, with a 1.27 mm (0.050") pitch.

**Table 3-3-2 Power Segment Pin Assignment and Descriptions**

Pin No. <sup>1</sup>	Function	Description
P1	NC/V <sub>33</sub>	3.3V power (Not used)
P2	NC/V <sub>33</sub>	3.3V power (Not used)
P3	DEVSLP	Enter/Exit DevSleep
P4	GND	Ground
P5	GND	Ground
P6	GND	Ground
P7	V5	5V power, pre-charge
P8	V5	5V power
P9	V5	5V power
P10	GND	Ground
P11	DAS/DSS#	Device Activity Signal / Disable Staggered Spin-up
P12	GND	Ground
P13	NC/V12	12V power (Not used)
P14	NC/V12	12V power (Not used)
P15	NC/V12	12V power (Not used)

Note: All pins are in a single row, with a 1.27 mm (0.050") pitch.



## 4.0 Command Set

### 4.1 ATA Command Set

ATP SATAIII SSD supports the commands show in the following table:

**Table 4-1**

Command Code	Command	Protocol
00h	NOP	Non-Data
06h	DATA SET MANAGEMENT	DMA
20h	READ SECTOR(S)	PIO Data -in
24h	READ SECTOR(S) EXT	PIO Data -in
25h	READ DMA EXT	DMA
29h	READ MULTIPLE EXT	PIO Data -in
2Fh	READ LOG EXT	PIO Data -in
30h	WRITE SECTOR(S)	PIO Data-Out
34h	WRITE SECTOR(S) EXT	PIO Data-Out
35h	WRITE DMA EXT	DMA
39h	WRITE MULTIPLE EXT	PIO Data-Out
3Dh	WRITE DMA FUA EXT	DMA
3Fh	WRITE LOG EXT	PIO Data-Out
40h	READ VERIFY SECTOR(S)	Non-Data
42h	READ VERIFY SECTOR(S) EXT	Non-Data
45h	WRITE UNCORRECTABLE EXT	Non-Data
47h	READ LOG DMA EXT	DMA
57h	WRITE LOG DMA EXT	DMA
5Bh	TRUSTED NON-DATA	Non-Data
5Ch	TRUSTED RECEIVE	PIO Data -in
5Dh	TRUSTED RECEIVE DMA	DMA
5Eh	TRUSTED SEND	PIO Data-Out
5Fh	TRUSTED SEND DMA	DMA
60h	READ FPDMA QUEUED	DMQ
61h	WRITE FPDMA QUEUED	DMQ
77h	SET DATE & TIME EXT	Non-Data
78h	ACCESSIBLE MAX ADDRESS CONFIGURATION	Non-Data
90h	EXECUTE DEVICE DIAGNOSTIC	EXECUTE DEVICE
92h	DOWNLOAD MICROCODE	PIO Data-Out
93h	DOWNLOAD MICROCODE DMA	DMA
B0h	SMART	Non-Data



Command Code	Command	Protocol
B0h/D0h	SMART READ DATA	PIO Data -in
B0h/D2h	SMART ENABLE/DISABLE AUTOSAVE	Non-Data
B0h/D4h	SMART EXECUTE OFF_LINE IMMEDIATE	Non-Data
B0h/D5h	SMART READ LOG	PIO Data -in
B0h/D6h	SMART WRITE LOG	PIO Data-Out
B0h/D8h	SMART ENABLE OPERATIONS	Non-Data
B0h/D9h	SMART DISABLE OPERATIONS	Non-Data
B0h/DAh	SMART RETURN STATUS	Non-Data
B4h	Sanitize Device	Non-Data
C4h	READ MULTIPLE	PIO Data -in
C5h	WRITE MULTIPLE	PIO Data-Out
C6h	SET MULTIPLE MODE	Non-Data
C8h	READ DMA	DMA
CAh	WRITE DMA	DMA
CEh	WRITE MULTIPLE FUA EXT	PIO Data-Out
E0h	STANDBY IMMEDIATE	Non-Data
E1h	IDLE IMMEDIATE	Non-Data
E2h	STANDBY	Non-Data
E3h	IDLE	Non-Data
E4h	READ BUFFER	PIO Data -in
E5h	CHECK POWER MODE	Non-Data
E6h	SLEEP	Non-Data
E7h	FLUSH CACHE	Non-Data
E8h	WRITE BUFFER	PIO Data-Out
E9h	READ BUFFER DMA	DMA
EAh	FLUSH CACHE EXT	Non-Data
EBh	WRITE BUFFER DMA	DMA
ECh	IDENTIFY DEVICE	PIO Data -in
EFh	SET FEATURES	Non-Data
F1h	SECURITY SET PASSWORD	PIO Data-Out
F2h	SECURITY UNLOCK	PIO Data-Out
F3h	SECURITY ERASE PREPARE	Non-Data
F4h	SECURITY ERASE UNIT	PIO Data-Out
F5h	SECURITY FREEZE LOCK	Non-Data
F6h	SECURITY DISABLE PASSWORD	PIO Data-Out



## 4.2 Identity Device Data

Word Address	Default Value	Data Field Type Information
0	0040h	General configuration
1	3FFFh	Obsolete
2	C837h	Specific configuration
3	0010h	Obsolete
4-5	0000h	Retired
6	003Fh	Obsolete
7-8	0000h	Reserved for assignment by the CompactFlash Association
9	0000h	Retired
10-19	Varies	Serial number in ASCII
20	0000h	Retired
21	0000h	Retired
22	0000h	Obsolete
23-26	Varies	Firmware revision in ASCII
27-46	Varies	Model Name in ASCII
47	8010h	READ/WRITE MULTIPLE support
48	4000h	Trusted Computing feature set options
49	2F00h	Capabilities
50	4001h	Capabilities
51	0000h	Obsolete
52	0000h	Obsolete
53	0006h	Field validity
54	Varies	Current Cylinders
55	Varies	Current Heads
56	Varies	Current Sector Per Track
57-58	Varies	Current Capacity
59	9D10h	Multiple sector setting
60-61	Varies	Total number of user addressable logical sectors for 28-bit commands (DWord)
62	0000h	Obsolete
63	0207h	Multiword DMA transfer Support MDMA Mode 0, 1, and 2
64	0003h	PIO transfer modes supported
65	0078h	Minimum Multiword DMA transfer cycle time per word
66	0078h	Device recommended Multiword DMA cycle time
67	0078h	Minimum PIO transfer cycle time without IORDY flow control
68	0078h	Minimum PIO transfer cycle time with IORDY flow control





Word Address	Default Value	Data Field Type Information
69	4D28h	Additional Supported Extended Number of User Addressable Sectors is supported Trimmed LBA range(s) returning zeroed data is supported Optional ATA device 28-bit commands supported Download Microcode DMA is supported Write Buffer DMA is supported Read Buffer DMA is supported Deterministic read after TRIM is supported
70-74	0000h	Reserved
75	001Fh	Queue depth
76	870Eh	Serial ATA capabilities Support Serial ATA Gen1 signaling speed (1.5 Gbps) Support Serial ATA Gen2 signaling speed (3.0 Gbps) Support Serial ATA Gen3 signaling speed (6.0 Gbps) Support NCQ(Native Command Queuing) Support receipt of host-initiated interface power Support Phy event counters Support READ LOG DMA EXT as equivalent to READ LOG EXT
77	0006h	Serial ATA Additional capabilities
78	014Ch	Serial ATA features supported Support DMA Setup Auto-Activate optimization Device supports initiating interface power management Support software settings preservation Device Sleep supported
79	0040h	Serial ATA features enabled Software settings preservation enabled
80	07F0h	Major revision number
81	006Dh	Minor version number
82	706Bh	Features/command sets supported 0 Support SMART Feature Set Support Security Mode Feature Set Support Power management feature set Support Write Cache Support Look-Ahead Support WRITE BUFFER command Support READ BUFFER command Support NOP command
83	7409h	Features/command sets supported 1



Word Address	Default Value	Data Field Type Information
		Support DOWNLOAD MICROCODE Command Support Advanced Power Management Feature Set 48-bit Address feature set supported Support FLUSH CACHE command Support FLUSH CACHE EXT command
84	4163h	Command Sets Support 2 Support SMART error logging Support SMART self-test The GPL feature set is supported WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported The 64-bit World Wide Name is supported
85	7069h	Features/command sets enabled 0 SMART feature set is enabled Power Management feature set is supported Volatile write cache is enabled Read look-ahead is enabled WRITE BUFFER command is supported READ BUFFER command is supported NOP command is supported
86	B409h	Features/command sets enabled 1 Supported DOWNLOAD MICROCODE Command Enable Advanced Power Management Feature Set 48-bit Address feature set Supported Support FLUSH CACHE command Support FLUSH CACHE EXT command
87	4163h	Features/command sets enabled 2 Support SMART error logging Support SMART self-test The GPL feature set is supported WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported The 64-bit World Wide Name is supported
88	007Fh	Ultra DMA modes True IDE UDMA mode 0 is supported True IDE UDMA mode 1 and below are supported True IDE UDMA mode 2 and below are supported True IDE UDMA mode 3 and below are supported



Word Address	Default Value	Data Field Type Information
		True IDE UDMA mode 4 and below are supported True IDE UDMA mode 5 and below are supported True IDE UDMA mode 6 and below are supported
89	0001h	Time required for Security erase unit completion
90	0001h	Time required for Enhanced security erase unit completion
91	00FEh	Advanced power management level value
92	FFFEh	Master Password Revision Code
93	0000h	Hardware configuration test results
94	0000h	Current automatic acoustic management value
95	0000h	Stream Minimum Request Size
96	0000h	Streaming Transfer Time -- DMA
97	0000h	Streaming Access Latency - DMA and PIO
98-99	0000h	Streaming Performance Granularity
100-103	Varies	Maximum user LBA for 48-bit Address feature set
104	0000h	Streaming Transfer Time - PIO
105	0008h	Maximum number of 512-byte blocks per DATA SET MANAGEMENT command
106	4000h	Physical sector size / Logical Sector Size
107	0000h	Inter-seek delay for ISO 7779 standard acoustic testing
108-111	Varies	Worldwide name
112-115	0000h	Reserved for a 128-bit worldwide name
116	0000h	Reserved for technical report
117-118	0000h	Logical Sector Size
119-126	0000h	Reserved
127	0000h	Removable Media Status Notification feature set support
128	0021h	Security Status Security Supported Security is disabled Enhanced security erase supported
129-159	Varies	Vendor specific
160	0000h	CFA Power mode
161	0000h	CFast Specific Support
162	0000h	Key Management Schemes Supported
163	0000h	CF Advanced True IDE Timing Mode Capabilities and Settings
164-168	0000h	Reserved
169	0001h	Data Set Management is Supported Trim is supported



Word Address	Default Value	Data Field Type Information
170-175	0000h	Reserved
176-205	0000h	Current media serial number
206	0035h	SCT Command Transport The SCT Command Transport is supported The SCT Write Same Command is supported The SCT Feature Control Command is supported The SCT Data Tables Command is supported
207-216	Varies	Reserved
217	0001h	Nominal media rotation rate Non-rotating media (SSD)
218-221	0000h	Reserved
222	11FFh	Transport Major Version Number Transport Type: Serial ATA8-AST SATA 1.0a SATA II: Extensions SATA Rev 2.5 SATA Rev 2.6 SATA Rev 3.0 SATA Rev 3.1
223-233	0000h	Reserved
234	0001h	Min number of 512-byte data blocks per Download Microcode operation
235	0200h	Max number of 512-byte data blocks per Download Microcode operation
236-254	0000h	Reserved
255	Varies	Integrity word (Checksum: 0x01 Signature: A5)



### 4.3 Smart Information

ATP SATAIII SSD supports S.M.A.R.T. ATA feature set in IDE mode, AHCI mode.

#### 4.3.1. Smart Subcommand Sets

In order to select a subcommand, the host must write the subcommand code to the device's Features Register before issuing the SMART Function Set command. The subcommands are listed below.

**Table 4-3-1**

Command Code	Command
D0h	SMART Read Data
D1h	SMART Read Attribute Thresholds
D2h	SMART Enable/Disable Attribute Autosave
D3h	SMART Save Attribute Values
D4h	SMART Execute Off-Line Immediate
D5h	Read Log
D6h	Write Log
D8h	SMART Enable Operations
D9h	SMART Disable Operations
DAh	SMART Return Status

Note: If the reserved size is below a threshold, status can be read from the Cylinder Register using the Return Status command (DAh)

#### 4.3.2. SMART Attribute

The following table defines the vendor specific data in byte 2 to 361 of the 512-byte SMART data.

**Table 4-3-2**

ID	Value (hex)	Attribute Name
1	01	Raw Read Error Count (0x01)
5	05	Reallocated Flash Blocks Count
9	09	Power On Hours (0x09)
12	0C	Normal Power On/Off count
14	0E	Device Physical Capacity (0x0E)
15	0F	Device User Capacity (0x0F)
16	10	Initial Spare blocks (0x10)
17	11	Remaining Spare Blocks at Current Time (0x11)
100	64	Total Erase Count
160	A0	Uncorrectable Sector Count When Read/Write
172	AC	Total Block Erase Failure (0xAC)
173	AD	Maximum Erase Count (0xAD)
174	AE	Unexpected Power Loss Count
175	AF	Average Erase Count



ID	Value (hex)	Attribute Name
181	B5	Total Block Program Failure
187	BB	Reported Uncorrectable Errors (0xBB)
194	C2	Device Temperature (0xC2)
195	C3	Hardware ECC Recovered
197	C5	Current Pending Block Count (0xC5)
198	C6	Offline Surface Scan (0xC6)
199	C7	SATA FIS CRC Errors
202	CA	Percentage of Drive Life Used
205	CD	Thermal Asperity Rate (TAR)
231	E7	Controller Temperature
234	EA	Total Sectors Read from NAND Flash
235	EB	Total Sectors Written to Device
241	F1	Total NAND Sectors Written to NAND Flash
242	F2	Total Sectors Read from Device
248	F8	Remaining Life %
249	F9	Spare Block Remaining

#### 4.4 SMART Command Transport

Action Code (hex)	Description
0003h	Error recovery control
0004h	Features control
0005h	SCT data tables

#### 4.5 Set Features

Feature code (hex)	Description
02	Enable write cache
66	Disable reverting to Power-On defaults
82	Disable write cache
CC	Enable reverting to Power-On defaults







## 5.0 Part Number Decoder





## 6.0 Certification and Declarations

Certification	Mark	Description
CE compliant		The CE marking (also known as CE mark) is a mandatory <a href="#">conformance mark</a> on many products placed on the single market in the <a href="#">European Economic Area</a> (EEA). The CE marking certifies that a product has met EU consumer safety, health or environmental requirements. CE stands for <i>Conformité Européenne</i> , "European conformity" in French.
UKCA		The UKCA (UK Conformity Assessed) marking is a new UK product mark for the products that conforms to the CE marking and sold in Great Britain, which is effective from 1 <sup>st</sup> of January 2021.
FCC		FCC Part 15 Class B was used for Evolution of United States (US) Emission Standards for Commercial Electronic Products, The United States (US) covers all types of unintentional radiators under Subparts A and B (Sections 15.1 through 15.199) of FCC 47 CFR Part 15, usually called just <a href="#">FCC Part 15</a>
BSMI compliant		BSMI logo signifies the product is compliant with Taiwan EMC standard for CNS13438.
RoHS	-	Compliant with the Restriction of Hazardous Substances (RoHS) Directive (2011/65/EU)
REACH	-	Compliant with REACH (Registration, Evaluation, Authorization and Restriction of Chemicals which is an EU Regulation that came into force on 1 June 2007

[www.atpinc.com](http://www.atpinc.com)

**ATP TAIWAN (HQ)**  
 TEL: +886-2-2659-6368  
 FAX: +886-2-2659-4982  
 sales-apac@atpinc.com

**ATP USA**  
 TEL: +1-408-732-5000  
 FAX: +1-408-732-5055  
 sales@atpinc.com

**ATP JAPAN**  
 TEL: +81-3-6260-0797  
 FAX: +81-3-6260-0798  
 sales-japan@atpinc.com

**ATP EUROPE**  
 TEL: +49-89-3749999-0  
 FAX: +49-89-3749999-29  
 sales-europe@atpinc.com

**ATP CHINA**  
 TEL: +86-21-5080-2220  
 FAX: +86-21-9687-0000-026  
 sales@cn.atpinc.com