

# ASUS IoT EBE-4U

19" rackmount 4U enclosure made of robust 1.2 mm SGCC sheet metal with up to 7 PCI / PCIe slots

## Features


- 19" rackmount 4U enclosure with 7x PCI / PCIe slots
- Supports 300W or 500W IPC power supply
- Compatible with Mini ATX, Micro ATX and ATX motherboards
- Suitable for various processor and RAM variants
- Durable 1.2 mm SGCC sheet metal




## ASUS IoT EBE-4U – 19-inch 4U rackmount chassis for industrial and AIoT applications

The ASUS IoT EBE-4U is a 19-inch 4U rackmount chassis designed specifically for industrial and AIoT computing applications. Constructed from robust and durable 1.2mm SGCC sheet metal and compatible with ATX, MicroATX and Mini-ITX motherboards, such as those powered by Intel® H110, Q170 or Q470E chipsets, the ASUS IoT EBE-4U is designed for high performance and excellent compatibility in demanding environments.


### Front view

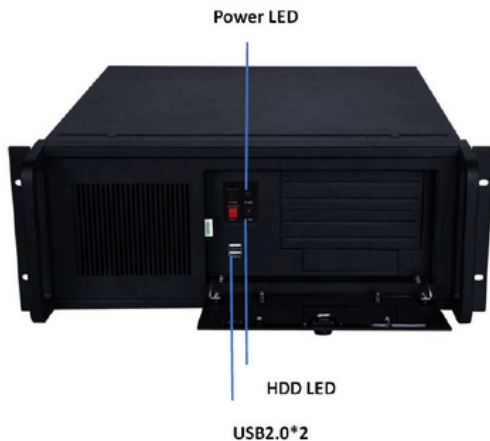

### Inside view

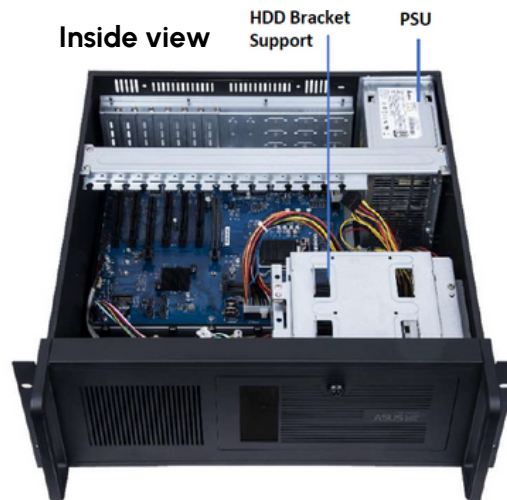

## Dimensions (mm)

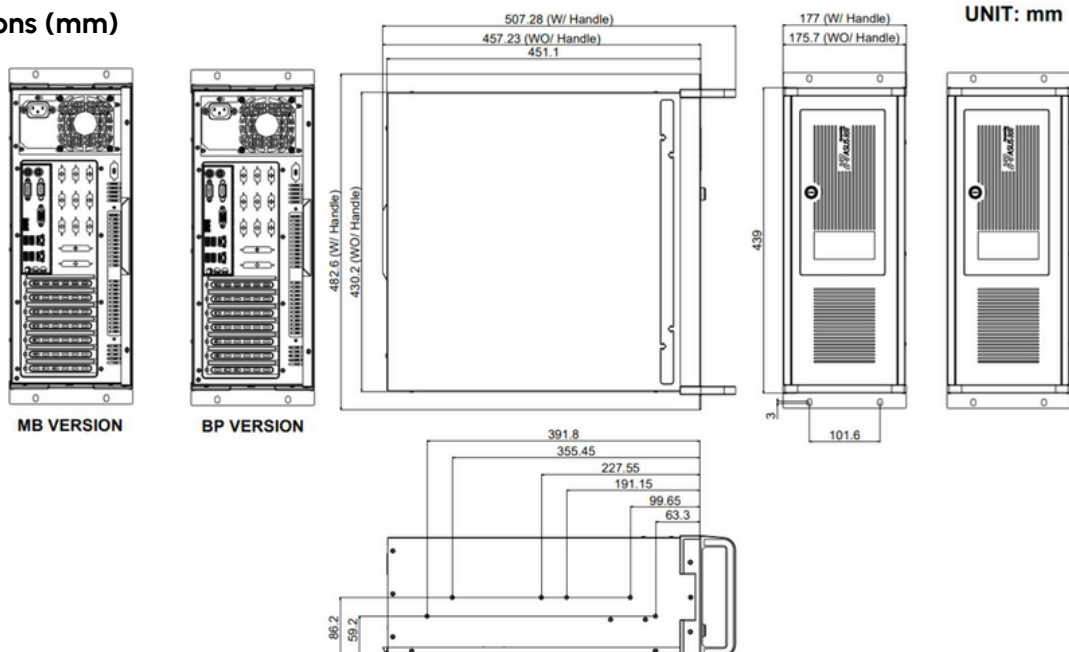

# ASUS IoT EBE-4U

19" rackmount 4U enclosure made of robust 1.2 mm SGCC sheet metal with up to 7 PCI / PCIe slots

Specifications	ASUS IoT EBE-4U
<b>SYSTEM</b>	
Motherboard	Compatible with ATX, Micro-ATX and Mini-ATX motherboards
Chipset	Compatible with Intel® H110, Q170 or Q470E chipsets
Storage	Supports 2x 3.5" HDD 1x 3.5" Slim HDD (19 mm)
Expansion	7x Full-Size PCI / PCIe
<b>INTERFACE</b>	
USB	2x USB 2.0 ports on the front
Rear I/O	Depending on the compatible motherboard design
Switch	On/off button, system reset button
<b>ENVIRONMENTAL</b>	
Power Supply	Compatible with 300 W Bronze or 500 W Gold ATX power supply unit
Fan	1x 12025 fan
Enclosure	Standard 19" rackmount 4U housing with 1.2 mm thick SGCC and SPCC sheet metal
Operating Temperature	0° ~ 40°C
Storage Temperature	-15° ~ 60°C
Humidity	10 ~ 95% @ 40°C, non-condensing
Dimensions	Without handle: 430.2 (W) x 457.2 (D) x 175.7 (H) mm With handle: 482.6 (W) x 507.3 (D) x 177 (H) mm
Certifications	CE.

# ASUS IoT EBE-4U

19" rackmount 4U enclosure made of robust 1.2 mm SGCC sheet metal with up to 7 PCI / PCIe slots

Ordering Information	ASUS IoT EBS-A700
<b>MODEL NO.</b>	
EBE-4U/H110A-IM-A	Part No. 90AE0060*, compatible ATX MB H110A-IM-A, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4UG/H110A-IM-A	Part No. 90AE00H0*, compatible ATX MB H110A-IM-A, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4U/H110A-IM-AB	Part No. 90AE0063*, compatible ATX MB H110A-IM-AB, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4UG/H110A-IM-AB	Part No. 90AE00H3*, compatible ATX MB H110A-IM-AB, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4U/Q170A-IM-A 3B	Part No. 90AE0061*, compatible ATX MB Q170A-IM-A, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4UG/Q170A-IM-A 3W	Part No. 90AE00H1*, compatible ATX MB Q170A-IM-A, power supply ATX 300W Bronze, 13.36kg net weight
EBE-4U/Q170A-IM-A 5B	Part No. 90AE0062*, compatible ATX MB Q170A-IM-A, power supply ATX 500W Gold, 13.64kg net weight
EBE-4UG/Q170A-IM-A 5W	Part No. 90AE00H2*, compatible ATX MB Q170A-IM-A, power supply ATX 500W Gold, 13.64kg net weight
EBE-4U/Q470EA-IM-A	Part No. 90AE0064*, compatible ATX MB Q470EA-IM-A, power supply ATX 500W Gold, 13.95kg net weight
EBE-4UG/Q470EA-IM-A	Part No. 90AE00H4*, compatible ATX MB Q470EA-IM-A, power supply ATX 500W Gold, 13.95kg net weight
<b>PACKING LIST</b>	
13050*	M.2 screw pack
14013*	SATA cable
14G1100*	Power cord
12AE0*	System accessories

\*NW is only for reference