


Dialogic® Diva® BRI Media Boards by Sangoma

The Dialogic® Diva® BRI (ISDN Basic Rate Interface) Media Boards provide one and four ISDN BRI ports and can serve as an excellent communication platform, which scales from 2 to 64 channels (phone lines) per single server.

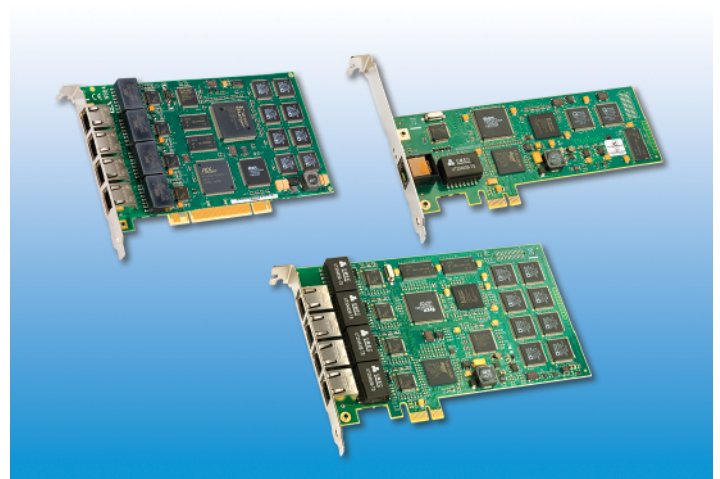

This datasheet discusses the following products:

- Dialogic® Diva® UM-BRI-2 Media Board (PCIe version only)
- Dialogic® Diva® UM-4BRI-8 Media Board (PCIe version only)
- Dialogic® Diva® BRI-2 Media Board (PCIe version only)
- Dialogic® Diva® 4BRI-8 Media Board (PCI and PCIe version)

Features

Onboard CPU with large RAM and powerful FPGA chip for fast data streaming between the host CPU, the DSPs, the phone line, and the other active components onboard

One powerful DSP dedicated to each communications channel

Sophisticated hardware design

Conforms to plug-and-play standards

Implements most supplementary services, many signaling protocols, as well as all multinational ISDN protocols

Voice packetization into Real-time Transport Protocol (RTP), adaptive jitter buffer, voice compression (G.726, GSM), and Comfort Noise Generation (CNG) available

Supports the same programming interfaces as other Dialogic® Diva® Media Boards, including CAPI, Dialogic® Diva® APIs and others

Up to eight Diva Media Boards of the same or different types can operate concurrently in a single server

Benefits

Can remove performance bottlenecks by offloading key real-time tasks that would ordinarily place an excessive burden on the host server, allowing Quality of Service (for example, voice quality and connection speed) to be more consistent

Provides real-time processing of complex operations (such as V.90 data modem, V.34 fax receiver and transmitter, voice compression, or echo cancellation) without reducing overall system performance, which lowers implementation costs

Operates with low power consumption

Permits easy installation and operation

Allows applications compatibility with major PBXs and can make a system based on Dialogic® Diva® technology ready for worldwide use

Permits legacy voice, speech, and conferencing applications to be used with VoIP clients and IP phones

Reduces porting efforts and time to market by making Diva Media Boards compatible with most standard telephony and communications applications

Easy scalability and flexibility to address an organization's communications needs in changing environments, such as VoIP



The Diva BRI offer voice, speech, conferencing, VoIP, modem and fax features, and can serve as a base for many communication applications. The boards support many standard applications, and are also suitable for new application development. The Diva BRI are available in Low Profile or Half Size form factors. The Diva BRI can be seamlessly combined with other Dialogic® Diva® Media Boards, such as analog, E1/T1, ISDN PRI, and VoIP.

The Diva 4BRI-8 PCI board shares the same features with its PCI Express (PCIe) version, so that the migration from PCI Server hardware to PCI Express hardware is easy. Sometimes it will be beneficial to be able to use PCI and PCIe versions in the same server.

The Diva BRI support the same set of application interfaces as other Diva Media Boards: the three Dialogic® Diva® APIs as well as CAPI, COM port, WAN Miniport and TTY. Because of this consistent interface support, applications written for another Diva Media Board will normally work without modification with Diva BRI.

The Diva UM-BRI-2 and UM-4BRI-8 support fax transmissions on half (50%) of their available channels. The feature-set of the Diva UM series has been designed to meet the needs of typical Unified Messaging applications.

The Diva BRI-2 and 4BRI-8 boards support V.34 fax transmissions on all (100%) available channels. The Diva BRI-2 and 4BRI-8 boards are usually referred to as part of the Universal series.

Technical Specifications

Quick Reference

Voice resources	2 or 8
Fax resources	2 or 8 (Universal series) and 1 or 4 (UM series)
Conferencing resources	2 or 8
Maximum boards/system	8 (tested by Dialogic); more than 8 are possible (application and server dependent) Yes
CSP	Low Profile: 1-port PCIe; Half Size: 4-port PCI/PCIe
Form factor	PCI rev 2.2 33 MHz or PCI Express 1.0a x1 lane (3.3/12 V)
Resource bus	1 or 4 RJ-45 connectors
Connection	ISDN BRI (Basic Rate Interface) in TE and NT Mode
Network interface	ETSI, NI-1, 4ESS, 5ESS, and all major ISDN protocols; QSIG; and more
Signaling	Windows and Linux. Details at https://wiki.sangoma.com/display/DVC/Dialogic+Voice+Cards
Operating system	PCI: 5; PCI Express: 3.3 and 12
Volts	None
Required accessories	

Hardware

- 32-bit RISC CPU, 100 MHz, 131 MIPS
- 2 or 8 DSPs (32.76 MHz and 65 MIPS)
- Onboard SDRAM Memory: 16MB (4-port, PCI), 64MB (1-/4-port PCIe)
- Telephony interface:
 - 1 x RJ-45 (1-port), RJ-45/RJ-45 cable supplied
 - 4 x RJ-45 (4-port), RJ-45/RJ-45 cables supplied

- Physical dimensions:
 - 1-port PCIe: 167.65 mm x 64.41 mm (PCB)
 - 1-port PCIe: 181.36 mm x 80.06 mm (with Low Profile bracket)
 - 1-port PCIe: 180.96 mm x 120.88 mm (with standard bracket)
 - 4-port PCI/PCIe: 174.63 mm x 106.86 mm (PCB)
 - 4-port PCI/PCIe: 187.84 mm x 126.37 mm (with standard bracket)
- High-impedance mode for passive monitoring
- I/O addresses, memory and interrupt allocated automatically
- Plug-and-play interface
- PCI: PCI 2.2, 33 MHz, 32 bit (also supports 64 bit dual address cycle DMA), 5 V supply required, 3.3 V, or 5 V universal signaling, supported in backwards compatible PCI-X slots
- Production quality: ISO 9002

Power Consumption and Environmental

- Power consumption:
 - 1-port PCIe: 0.27A @ +3.3 V and 0.17A @ 12 V (typical)
 - 4-port PCI: 0.58A @ +5 V (typical)
 - 4-port PCIe: 0.42A @ +3.3 V and 0.19A @ 12 V (typical)
- Operating temperature: 10°C to 50°C
- Storage temperature: 0°C to 70°C
- Maximum tolerance in voltage fluctuation: According to the respective PCI or PCI Express specification

Dialogic® Diva® System Release Software and Dialogic® Diva® SDK Software

- Supported operating systems: Windows and Linux. Details at <http://www.dialogic.com/systemreleases>
- M-adapter feature (Dialogic patented technology): Combined Virtual Adapter, Internal Call Transfer, Explicit Call Transfer Emulation
- SNMP support:
 - Windows: v2c
 - Linux: Net-SNMP v1, v2c and v3
- Application interfaces (provided by Dialogic Diva System Release Software and Dialogic Diva SDK):
 - Microsoft: Diva API, Diva API for .NET, Diva Component API (VB.NET), COM Port, WAN Miniport, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)
 - Linux: Diva API, TTY, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)

Features - Signaling

- DSS1 (Euro-ISDN), NI-1 (North America National ISDN 1), 5ESS (North America), 1TR6 (Germany), INS Net 64 (Japan), VN3 (France), CT1 (Belgium), QSIG
- Call progress analysis:
 - Busy tone detection
 - Ring back tone detection
 - Special Information Tone (SIT) detection
 - Fax/modem detection
 - Dial tone detection
- ISDN supplementary services:
 - Number identification services (CLIP, CLIR, COLP, COLR, KEY, MSN, DDI, SUB)
 - Call offering services (TP, CFU, CFB, CFNR)
 - Call completion services (CW, HOLD, ECT)
 - Charging services (AoC)
 - Three-party conference
 - Large conference

Features – Media Processing

- Voice and speech:
 - G.711 coding (A-law, μ -law selectable)
 - DTMF detection, generation, clamping and filtering
 - Generic tone detection and generation
 - Pulse tone detection
 - Full-duplex voice, barge-in
 - Voice Activity Detection (VAD)
 - Silence detection
 - Human talker detection
 - Recording Automatic Gain Control (AGC)
 - Pitch control
 - Audio tap
 - G.168 echo cancellation, up to 128 ms tail length
- Voice over IP (VoIP):
 - G.711 voice coder (64 kbps, μ -law, A-law)
 - G.726 voice coder (32 kbps)
 - G.729 voice coder (VoIP licenses required)
 - GSM voice coder (13 kbps)
 - Adaptive jitter buffer
 - Voice Activity Detection (VAD)
 - Comfort Noise Generation (CNG)
 - Real-time Transport Protocol (RTP) framing
 - G.168 echo cancellation, up to 128 ms tail length
- Switching and conferencing:
 - Onboard and cross-board switching and (large) conferencing via line interconnect (call tromboning)
 - Automatic Gain Control (AGC)
- Support for Fax Class 1 and 2
- Support for Fax Group 3, T.30:
 - V.17, V.29, V.27ter, V.21, V.34 modulation
 - Fax polling/ fax on demand
 - Up to 33.6 kbps with each channel (send and receive)
 - Page formats: ISO A4, B4, A3
 - Fax compression MH, MR, MMR
 - Error Correction Mode (ECM)
 - Standard, fine, super-fine and ultra-fine resolution
 - Color fax (JPEG-format)
- Data modem (Remote Access, POS and other Low Bit Rate (LBR) applications):
 - V.21, V.22, V.22bis, Bell 103, Bell 212A, V.32, V.32bis, V.34, V.42, V.42bis, V.90, MNP4, MNP5, V.110, V.120
 - Modem with extension: V.18, V.21, Bell 103, V.23, EDT, Baudot45/47/50 incl. DTMF, V.42, V.42bis
 - B-channel protocols: Transparent HDLC, Transparent Voice, Synchronous PPP and MLPPP, X.75 (LAPB), X.75/V.42bis, LAPD, T.90NL, T.70NL, X.25, X.31, Rate adaption (56 kbps), PIAFS 1.0 / 2.0, SDLC

Approvals, Compliance and Warranty

Country-specific safety and telecom approvals

<https://portal.sangoma.com>

Warranty Information

<https://www.sangoma.com/warranties>

Ordering Information

Please see the [Models](#) tab for these products

ABOUT SANGOMA

Sangoma Technologies Corporation is a trusted leader in delivering globally scalable Voice-Over-IP telephony systems, both on-site and cloud-based. As the communication landscape evolves and businesses invest in new strategies to provide effective communications, Sangoma Technologies is your trusted partner; delivering Unified Communications solutions for SMBs, Enterprises, OEMs, Carriers, and service providers.

Founded in 1984, Sangoma Technologies Corporation is publicly traded on the TSX Venture Exchange (TSX VENTURE: STC).



Sangoma Technologies

100 Renfrew Drive, Suite 100 Markham ON L3R 9R6 CANADA

1 800 388 2475 toll free in N. America

+1 905 474 1990 international direct

www.sangoma.com

sales@sangoma.com

