

ANT LMP-1002G-SFP Series


10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) + 2*100/1000 SFP Slots

Features

- Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port and 2*100/1000 SFP Slots for Fiber Connections
- Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- Supports IPv4/IPv6, and DHCP Option 66/67/82
- Supports Modbus/TCP protocol for Device Management and Monitoring
- Configuration: Web Console, Telnet, CLI Command
- IGMP v1/v2 for Multicast Traffic Filtering
- QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- IEEE802.1Q VLAN for Easy Network Planning
- Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- Auto Warning by Exception through E-mail, Relay Output
- Support RMON Function for Efficient Network Monitoring
- Support Port Mirroring for Online Diagnostic
- 5-Year Warranty



DIMENSIONS

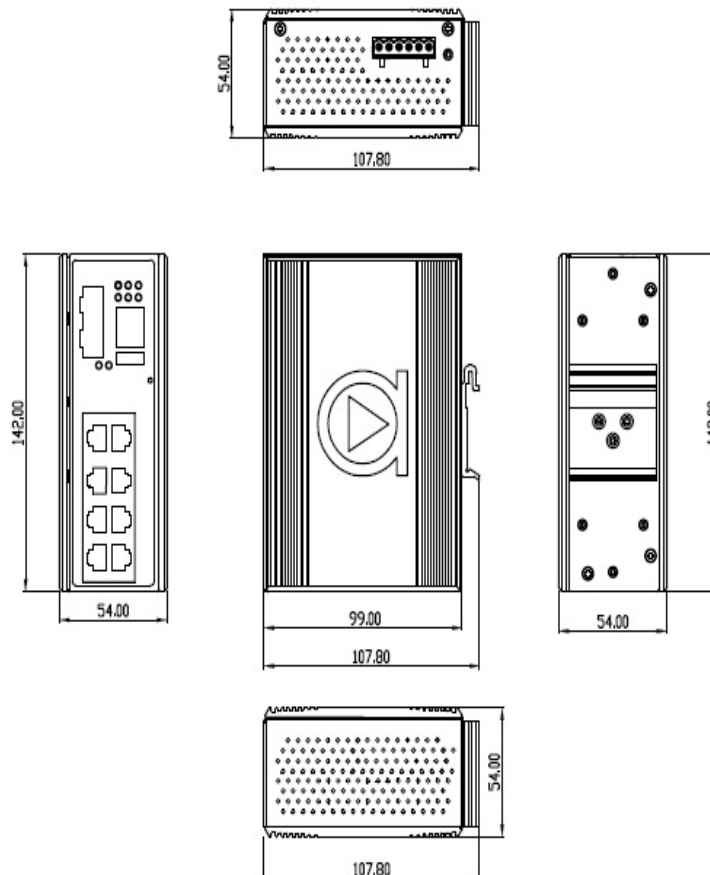

ANT LMP-1002G-SFP Series

SPECIFICATIONS

Technology		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.3at/af PoE (Power-over-Ethernet) IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
Standards		IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6
Protocol		
Switch Properties		
Switch Architecture	Back-Plane (Switching Fabric): 10.0Gbps	
Configuration	Web Console, Telnet, CLI	
Processing Type	Store-and-Forward	
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	
Packet Buffer	4 Mbits	
Jumbo Frame	9.6K	
MAC Table Size	8K	
VLAN Group	1 ~ 4094	
IGMP Group	Up to 256 Groups	
Port Interface		
Ethernet Port	8*10/100/1000BaseTx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI connection	
Fiber Port	2*100/1000 SFP Slots for Fiber	
Wavelength	Refer to SFP Modules	
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1	
Configuration Backup	1*USB 2.0	
LED Indicators	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)	
Protection		
Overload Current	Present	
Power Reverse Polarity	Present	
CPU Watchdog	Present	
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	
Mechanical Characteristics		
Housing	Metal, IP30 rated	
Dimensions	54 x 142 x 99 mm	
Weight	Unit: 2.4 lbs Shipping: 3.2 lbs	
Mounting	DIN-Rail; Wall-mount (Optional)	
Power Requirement		
Input Voltage	48~55VDC Redundant Input	
Power Connection	1 removable 6-contact terminal block	
PoE Power Output	25W/port @ 48VDC power input 30W/port @ 51~55VDC power input	
Power Consumption	15 Watts (no PD included) 215 Watts @ 48VDC 255 Watts @ 51~55VDC	
Environmental Limits		
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C	
Storage Temperature	-40°~85°C	
Ambient Relative Humidity	5 to 95%, (Non-condensing)	
Regulatory Approvals		
EMI	FCC Class A	
EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4	
Free Fall	IEC60068-2-32	
Shock	IEC60068-2-27	
Vibration	IEC60068-2-6	
Green	RoHS Compliant	
Certifications	FCC, CE, UL 61010-1, 61010-2-201, NEMA TS2	
Warranty	5 Years	

ORDERING INFO

LMP-1002G-SFP 10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots

LMP-1002G-SFP-T 10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots; EOT: -40° to 75°C

Optional Accessories

MDR-60-48 60 Watt Industrial Slim Single Output DIN-Rail Power Supply – 48VDC / 1.25 Amps

DR-75-48 75 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 1.6 Amps

DR-120-48 120 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 2.5 Amps

SDR-240-48 240 Watt Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 5.0 Amps