

EKI-2725

5-port Gigabit Unmanaged Industrial Ethernet Switch

Features

- Provides 5 Gigabit Ethernet ports with Auto MDI/MDI-X
- Supports 10/100/1000 Mbps Auto Negotiation
- Supports jumbo frame transmission up to 9kbytes
- Provides Slim size, DIN-rail with IP30 metal mechanism
- Supports Redundant 12 ~ 48 V_{DC} power input and P-Fail Relay



Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ab
- **LAN** 10/100/1000Base-T(X)
- **Transmission Distance** Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** 5 x RJ45
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
10/100/1000T (X): Link/Activity, Duplex/Collision

Power

- **Power Consumption** 2.5W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Fault Output** 1 Relay Output

Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
-40 ~ 75°C (-40 ~ 167°F) / (I model)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 2,296,909 hours


Certifications

- **Safety** UL 62368
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

EKI-2725

Dimensions

Unit: [mm]

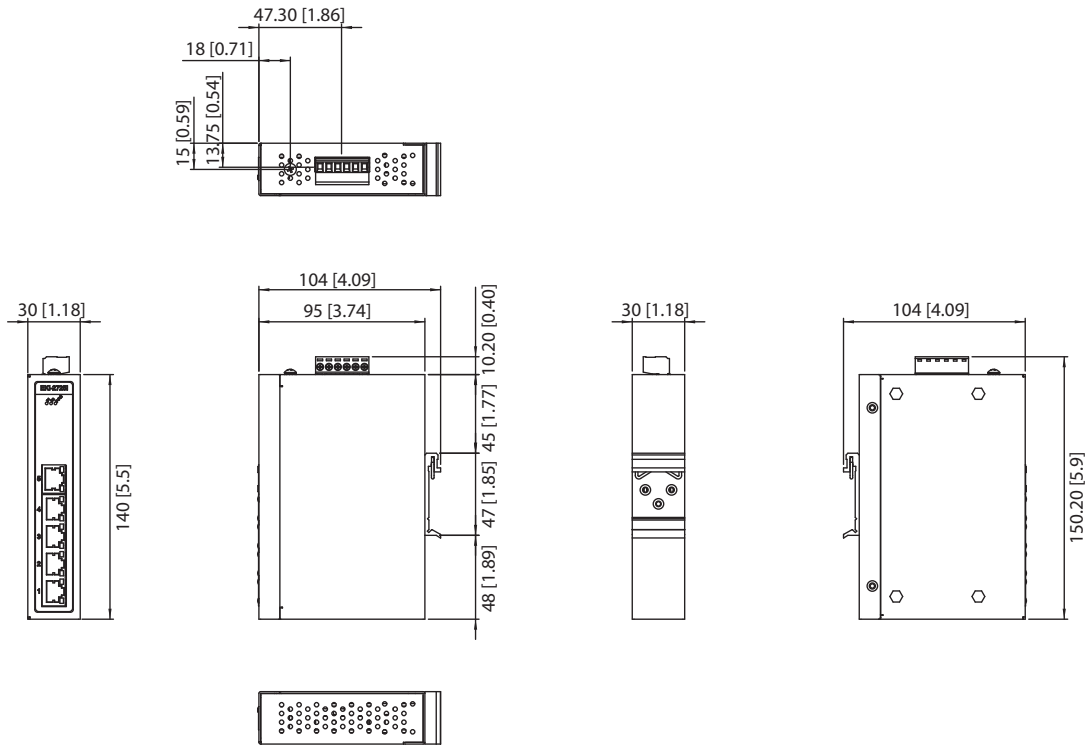

Ordering Information

- **EKI-2725-CE** 5-port Gigabit Unmanaged Switch
- **EKI-2725I-CE** 5-port Gigabit Unmanaged Switch w/wide temp